

RoLock dry glove system manual


Congratulations on your purchase of the RoLock dry glove system. You will be satisfied with this quality product from Switzerland. The lock is made of highly qualitative Delrin, a very durable plastic material. This guarantees usage in temperatures up to 32° C. The RoLock dry glove system will make your diving a lot easier. If there should be any defects contrary to all expectations please contact your retail dealer. We give a one year guarantee when used properly. There is no guarantee for inappropriate unprofessional use.

The RoLock dry glove system fits all dry diving suits with attached latex cuffs as well as suits where the latex cuffs have to be attached with an O - ring. The gloves can be mounted without any pasting to the lock rings (even at your diving spot). The RoLock dry glove system assures you an easy way of putting on and taking of your gloves, even without any help. Because of the inner mounting, the glove is protected in an extensive way against external influences.

The delivery includes:

2 lock rings for the suit (left/ right), 2 lock rings for the gloves (left/ right), 2 clips to fasten the gloves (black, blue, red), 2 gasket O - rings (thin), 1 plastic jar with silicone lubricant, 1 manual.

There are 3 different kinds of fasteners for the RoLock dry glove system. With the help of the table below, you can see which glove fits with which system. For the systems one and three 2 additional O - rings are enclosed, which are to be fastened in the groove.

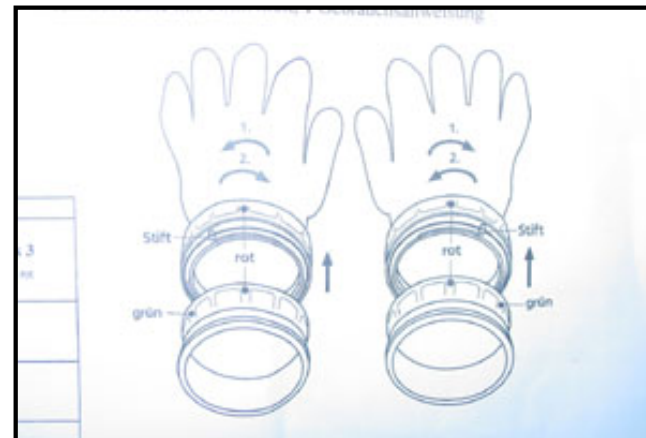


Lubricate generously the gasket O - rings and lock mechanism before use. Use the lock a few times after lubrication to loosen it up.

Mounting of lock ring on suit with attached latex cuff

At first lubricate all the thin gasket O - rings with the enclosed silicone lubricant. Then place these into the front groove of the lock ring. Pressure may be required.




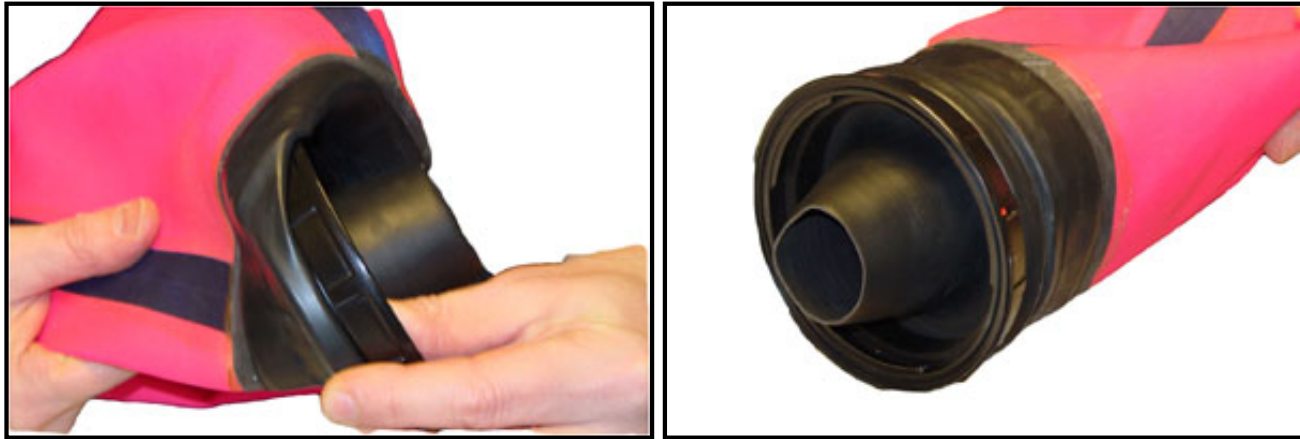

Mounting of lock ring on suit without an attached latex cuff


Basically it is the same procedure as on suits with attached latex cuffs. Remove any mounted latex cuffs from the suit. Turn them and mount the lock rings on the latex cuffs. Turn back the cuffs into original position after mounting. Then mount the latex cuffs together with the lock ring on the dry suit.

Mounting of lock ring on glove

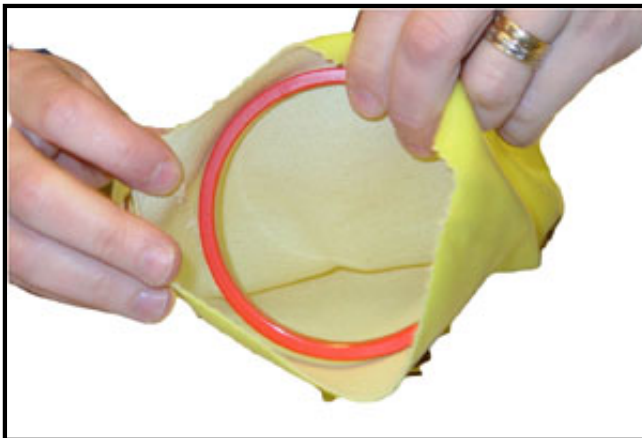

9. To mount the glove you need the following objects according to the picture (glove, lock ring for glove side with coloured marking and the fastener). The thin O-ring is only for use with thin outer gloves.

10. First you place the fastener into the glove.

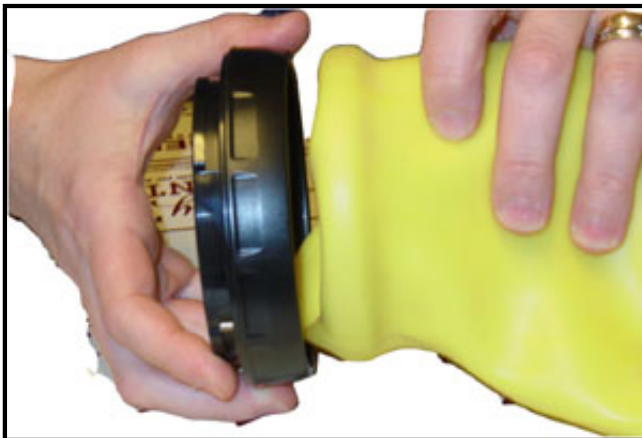



15. Place the fastener at the very bottom of the lock ring.

16. Now push, with both hands, the fastener into the lock ring from bottom to top. Check for folds.



17. Remove all folds according to the picture.



Locking of the RoLock dry glove system



19. Put on your dry suit a usual.



20. Then put on a glove. The two yellow lock points are precisely behind each other.



21. Hold the lock ring to the glove with your hand. Clench your fist inside the glove and turn the glove outwards, until the red and yellow dots are next to each other. The lock rings will now be hooked on.



22. Now pull your fist back firmly and turn your fist inwards until both yellow dots are next to each other.



23. The RoLock glove system is now closed.

Use reverse procedure to open the system.

CAUTION:

Do not under any circumstances cut the inner part of the cuffs after the lock rings have been mounted. The cuffs have to be closed tightly after the lock rings have been mounted. Protect the gloves against sharp objects. Do not ever pull the lock ring and glove apart. The connection may unfasten and the mounting of a new glove will be required.

Never destroy the gasket O - ring or the tight surfaces on the lock.

The gloves and lock rings are not to be exposed for long lasting direct solar radiation.

Do not keep the lock rings in closed condition.

Only dive according to valid directions.

There is no guarantee for inappropriate unprofessional use.

Subject to alteration.

UK Diving Collection
Kullagatan 106
263 39 Höganäs
Phone: +46 (42) 34 92 44

Web: www.nordic-blue.com
Mail: uk.diving@hbg.bonet.se